

LED DENTAL LAMP

Model: ☐ KY-P106A



USER MANUAL

Preface

Please kindly read this user manual before assembling and use this product, and keep well for repeated use. Please carefully follow the the instruction and do the maintenance correctly. Please mind the passage with “Warm” and “Attention” , read carefully, and follow strictly, avoid to do harm to user and the device.

Please contact our sales agent immediately for repair when you find something wrong with this device.

● Safety cautions

Before starting this device, please obey the basic safety precaution listed below, so as to keep away of the risk of damage to device, or harm to user, as well as causing fire, electric shock.

Comply the instruction on the device and the manual, if you can not understand the instruction please ask our after-sales serve staff or sales agent for help.

Please shut down the power supply before repairing or cleaning the device.

No placing and hooking any heavy things on the device.

No using the power wire unsuitable to this device, otherwise, it must degrade its performance, even damage the device, cause fire or electric shock.

Do not remove or mend the device without agreement from our agent or our technician, thus avoid the incident of electricity shock and damage to people or device.

Please only adjust the controllable items mention in the instruction correctly, adjusting other controlling volume wrongly will damage the device.

This manual is limited to be used for KY-P106A, the data or details shown herein are available when this manual post, and we may revise some index or design without notifying the users.

⚠ Attention : Warranty is not valid if these rules below are not followed.

- (1) follow the instruction correctly.
- (2) Use the device according the instruction only.
- (3) Power supply wire must be qualified with demand of the power of this dental lamp.
- (4) This dental lamp should be fixed firmly.
- (5) Any repair, modification, or revision to this Dental lamp should be performed by the engineer appointed by us.
- (6) The components needed to be changed should be adopted the ones for ours, otherwise may reduce the performance and or destroy the device.

一、Description


1. Intended Use

The item is used for the diagnose、cure and operation of the medicine department.

2. General Introduction

Products structure and components

KY-P106A, As showed below picture 1:

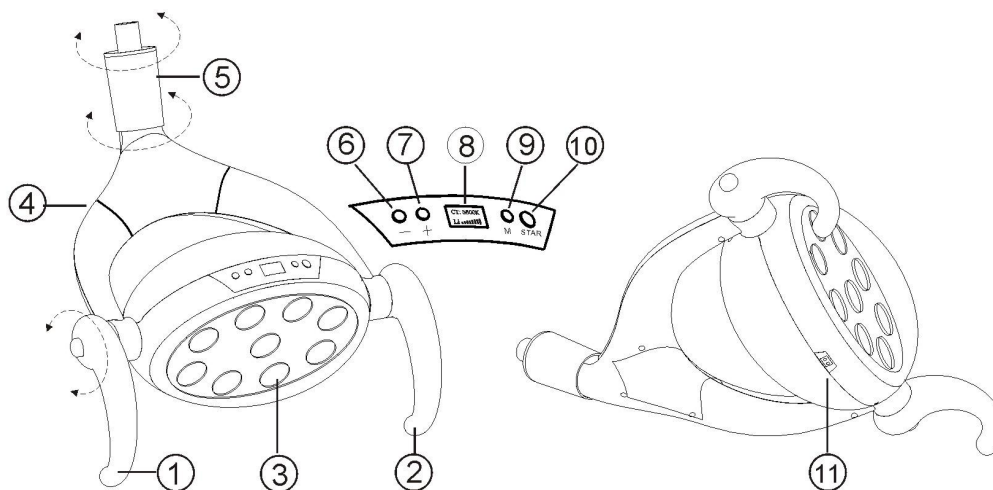

Picture 1

- | | | |
|----------------------------|------------------------|------------------------|
| 1. —Handle(right side) | 2. — Handle(left side) | 3. — Lens |
| 4. — Holder | 5. — Spindle | 6.— Bottom(for reduce) |
| 7. — Bottom (for increase) | 8. — Screen | 9. — Model Bottom |
| 10. —On/Off Bottom | 11. — Induction Window | |

3. Environmental Requirement:

Storage Transportation Environment:

Temperature: $-20^{\circ}\text{C} - 70^{\circ}\text{C}$

Relative Humidity: 10%—90%

Service Environment:

Temperature: $5^{\circ}\text{C} - 45^{\circ}\text{C}$

Relative Humidity: 10%—90%

Atmospheric Pressure: 500—1060hpa

4. Specification:

Input Voltage: AC:12-24V

Frequency: 50/60Hz

Power: 25VA

Illumination: 8000—23000LUX


Color Temperature: 4000—5000 K can be adjustable, single yellow light: 3000K

Spot Size: 80X160mm (Distance for 700mm)

Control Method : Induction Switch, 8 grade Illumination can be adjusted.

二、 Operational Approach :

1. The handle can adjust the light spot angle according to the users' requirements and can be removable, as showed below picture 3:

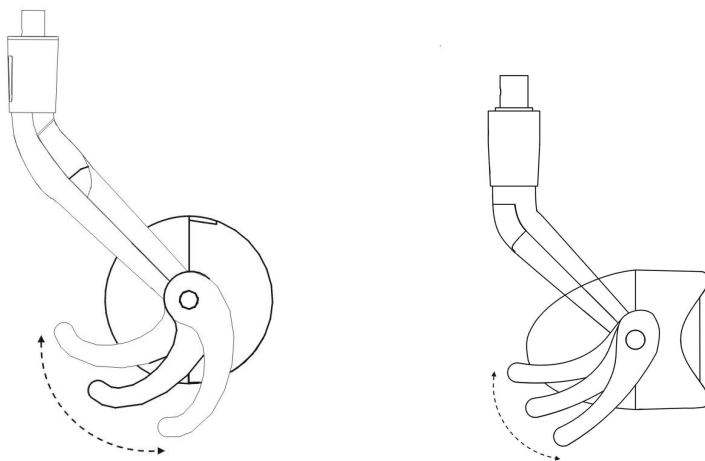

Picture 2

2. Control Method :

Showed as picture 1

A) Color Temperature Setting :

Press “M” bottom, “The “CT:5000K” on the screen is flashing. Then press “△” or “▽”, 设 to set the temperature of the white light, and then press “M” bottom to finish the settin: the range of color temperature is from 4000K---5000K.

B) Luminance Setting:

Press “M” bottom, when “Li: ■■■■ ” is flashing, press “△” or “▽” to set the luminance.

C) To open or close by induction:

To control the ON/OFF if the white light by crossing the sensor from the 50-120 mm distance.

D) To control the illumination by induction:

When led dental lamp is lighting, put the hand on the above of the sensor by 50-120mm distance the light can be changed from dark to bright. When move the hand away, the illumination will remain. 8 grade Illumination can be adjusted.

E) Yellow light Setting:

As Picture 1 shown, Press“▼”button for one second, Color Temperature can be adjusted to 3000K, which is convenient for filling with resin when doctor’s using,then output light turn into yellow light.Press“▼”button again, Color temperature for 3000K return to the original color temperature.

三、Washing and Sterilization


The transparent lens of the LED dental lamp can be scrubbed and cleaned by the lens paper.
The casing and handle can be washed by neutral cleaning fluid, alcohol and disinfectant.

四、Installing Instruction and Specifications:

1. Installing Instruction

To connect the plug of the led dental lamp and arm, tightening the led dental lamp and arm by M5 screw, then connect the arm to the AC:12V-24V power of the dental chair.

2. Schematic Circuit Diagram

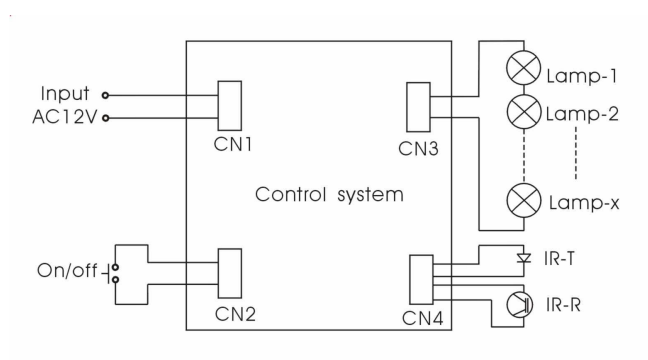

3. Packing List

(1)	LED lamp	1 pcs
(2)	Hex key	1 pcs
(3)	User manual	1 Pcs
(4)	Ornament	1pcs

The final interpretation right belongs to our company